




NTN Bearing Driveshaft USA CORP.

INA PCF30 Bearing units

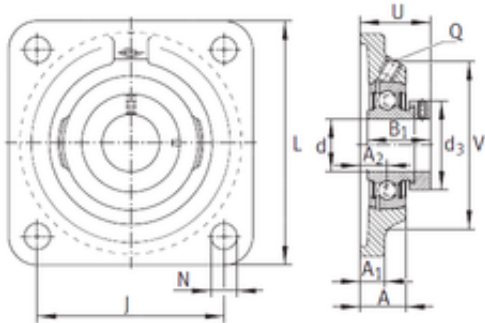

PCF30 Bearing 2D drawings and 3D CAD models

Bearing No. PCF30

Bore Diameter	30 mm
d	30 mm
V	85 mm
U	40 mm
Thread (Q)	Rp1/8
d3	44 mm
A	22,3 mm
A1	12 mm
B1	35,8 mm
J	82,5 mm
L	108 mm
N	11,5 mm
A2	13,3 mm
Weight	1,01 Kg
Basic dynamic load rating (C)	19,5 kN
Category	Flange Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	1.209
Product Group	M06110
Number of Mounting Holes	4
Mounting Method	Eccentric Collar
Housing Style	4 Bolt Square Flange Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron



NTN Bearing Driveshaft USA CORP.

Expansion / Non-expansion	Non-expansion
Mounting Bolts	11.5 Millimeter
Relubricatable	Yes
Insert Part Number	GRAE30NPPB
Seals	Double Lip Contact
Housing Configuration	1 Piece Solid
Pilot Configuration	No Pilot
Inch - Metric	Metric
Long Description	4 Bolt Square Flange Block; 30MM Bore; 117MM Bolt Circle; 82.5MM Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 35.8MM Length Thru Bore; Relubricatable; Double Lip Conta
Other Features	Single Row With Set Screw
Category	Flange Block
UNSPSC	31171501
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Flanged
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	PCF30
Weight / LBS	2.227
Bore	1.181 Inch 30 Millimeter
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Bolt Spacing	3.248 Inch 82.5 Millimeter
Length Thru Bore	1.409 Inch 35.8 Millimeter
Nominal Bolt Circle Diameter Round	4.6 Inch 117 Millimeter
Cartridge Pilot Depth	0 Inch 0 Millimeter